

# SuperFlow™ SERIES



## FEATURES

- 8 to 10,000 liters for sizes not covered by PressureWave™ and Challenger™ Series
- 10, 16 and 25 bar pressure rating
- Almond RAL 1013
- Built-in pressure gauge (Models SF100-SF10,000)
- ISO : 9001, CE approved

Global Water Solutions' SuperFlow™ tanks are ideally suited for applications where high-pressure ratings are required. These applications include booster systems, heating expansion and hammer arresting in high-rise and multistory buildings such as hotels, hospitals or business centres.




SuperFlow™ tanks range from 8 to 10,000 litres and are available in 10, 16 and 25 bar pressure ratings which makes GWS one of the most comprehensive suppliers globally. The interchangeable membrane design of the tanks allows you to replace the membrane whenever required, and the built-in pressure gauge, starting at tanks of 100 litres size, makes the system-pressure control as easy as possible.

SuperFlow™ Series vessels are quality checked at several stages during the production and given regular maintenance, we recommend pre-charge check every 3 month, these vessels represent the best value for the investment and are designed to serve your needs for years to come.

# SPECIFICATIONS

## SuperFlow™ Series Models

Model Numbers			Connection	Nominal Volume	Ship Weight			Dimensions	
Inline 10 bar	Inline 16 bar	Inline 25 bar			10 bar	16 bar	25 bar	A	B
			inches	liters	kg	kg	kg	cm	cm
N/A*	N/A*	SUB-12LX	1"	12	N/A	N/A	9	22	38
N/A*	N/A*	SUB-19LX	1"	19	N/A	N/A	11	28	43
N/A*	N/A*	SUB-35LX	1"	35	N/A		22	38	47
Vertical 10 bar	Vertical 16 bar	Vertical 25 bar	inches	liters	kg	kg	kg	cm	cm
N/A*	N/A*	SUB-50LV	1"	50	N/A	N/A	30	38	75
N/A*	N/A*	SUB-60LV	1"	60	N/A	N/A	33	38	81
N/A*	SMB-80LV	SUB-80LV	1"	80	N/A	26	46	43	96
N/A*	SMB-100LV	SUB-100LV	1"	100	N/A	28	51	46	99
N/A*	SMB-150LV	SUB-150LV	1"	150	N/A	50	85	50	110
N/A**	SMB-200LV	SUB-200LV	1 1/4"	200	N/A	68	112	59	112
N/A**	SMB-300LV	SUB-300LV	1 1/4"	300	N/A	79	130	64	123
N/A**	SMB-500LV	SUB-500LV	1 1/4"	500	N/A	115	202	75	155
SFB-750LV	SMB-750LV	SUB-750LV	2"	750	110	220	328	75	195
SFB-850LV	SMB-850LV	SUB-850LV	2"	850	145	235	344	80	195
SFB-1000LV	SMB-1000LV	SUB-1000LV	2"	1000	165	250	368	80	218
SFB-1500LV	SMB-1500LV	SUB-1500LV	2"	1500	250	375	495	96	238
SFB-2000LV	SMB-2000LV	SUB-2000LV	2"	2000	370	520	745	110	252
SFB-3000LV	SMB-3000LV	SUB-3000LV	2 1/2"	3000	550	780	910	120	280
SFB-4000LV	SMB-4000LV	SUB-4000LV	3"	4000	730	980	1290	145	310
SFB-5000LV	SMB-5000LV	SUB-5000LV	3"	5000	840	1140	1472	145	372
SFB-10000LV	SMB-10000LV	SUB-10000LV	4"	10000	1920	2500	2980	160	575
Horizontal 10 bar	Horizontal 16 bar	Horizontal 25 bar	inches	liters	kg	kg	kg	cm	cm
N/A*	N/A*	SUB-24LH	1"	24	N/A	N/A	13.5	47	28
N/A*	N/A*	SUB-50LH	1"	50	N/A	N/A	30	62	38
N/A*	N/A*	SUB-60LH	1"	60	N/A	N/A	33	67	38
N/A*	SMB-80LH	SUB-80LH	1"	80	N/A	26	46	72	43
N/A*	SMB-100LH	SUB-100LH	1"	100	N/A	28	51	80	46

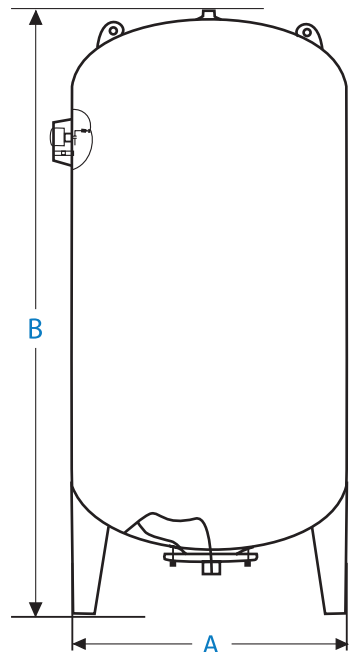

Note: Minor dimensional variation may occur

### Interchangeable membranes

EPDM for 12L - 4000L, Butyl for 5000L - 10000L, working temperature -10°C / 14°F to 90°C / 194°F

Tank precharge: 4.0 bar / 58 psi

\*Use PressureWave™, Max™ or UltraMax™ Series tanks \*\* Use Challenger™ Series tanks

